

colour formula
YE2166BC

colour formula
BR10553BC

colour formula
BL20786BC

Pro-Spray®

EUROPEAN AUTOMOTIVE FINISHES

Pro-Spray® 1K & 2K Premium Aerosols

Premium Spray Gun Quality Finish From An Aerosol

What do Pro-Spray® Aerosols offer that other aerosols don't? Pro-Spray 1K and 2K Aerosols consistently deliver professional spray gun quality and performance. Utilizing SPRAYMAX® innovative propellant technology and patented nozzle and valve design, Pro-Spray aerosols provide high output, larger spray patterns and excellent atomization with constant pressure.

Pro-Spray 2K Aerosols

A-535-12 Pro-Spray 2K Urethane Filler Primer Gray

- Excellent Fill & Build
- Quick Dry & Easy Sanding
- 30 Minutes to Topcoat

PSC-1000-12 Pro-Spray 2K Rapid Cut-in Spot Clear Coat

- Rapid Curing, Spray Gun Like Results
- Excellent Flow & Leveling
- Ultra Clear, High Gloss, UV-Resistant
- Buffs in 10 Minutes!*

*Buff in 10 minutes when using IR cure

Pro-Spray 1K Aerosols

A-513-12 Pro-Spray 1K Self Etch Primer

- Excellent Corrosion Protection
- Ideal for Small, Bare Metal Break Throughs

A-525-12 Pro-Spray 1K Plastic Adhesion Promoter

- For all PE-/PP-Plastics
- Provides Excellent Adhesion of All Topcoats

ICR-0010-12 Silicone Remover

- Excellent Cleaning Power
- Removes Silicone, Oil, Wax, Dirt, Tar & Other Contaminants



PRO-SPRAY®
European Automotive Finishes
600 Nova Drive SE
Massillon, Ohio 44646
330-830-8445
www.prosprayfinishes.com

Pro-Spray®
EUROPEAN AUTOMOTIVE FINISHES

The Ultimate in European Refinishing Technology and Value.™

SS-245 12/07

1K & 2K Premium Aerosols

Premium Spray Gun Quality Finish From An Aerosol

Pro-Spray A-513-12
1K Self Etch Primer

Application

A gray shade of 1K superior etch primer. Excellent flow and leveling properties. Suitable for spot repairs and especially for sand-through areas. Also usable as a welding and rust protection primer.

Color Gray
Dry Time 10-15 minutes
@70°F
Contents 11.6 oz. / 330 g

Pro-Spray A-525-12
1K Plastic Adhesion Promoter

Application

Top quality adhesion promoter for plastic surfaces. Topcoat with Pro-Spray basecoat / clearcoat.

Color Clear
Dry Time 10 minutes
@70°F
Contents 10.6 oz. / 300 g

Pro-Spray ICR-0010-12
Silicone Remover

Application

Cleaning product for the easy and quick removal of grease, oil, silicone, wax, dirt and other contaminants.

Color Clear
Contents 8.7 oz. / 248 g

Pro-Spray A-535-12
2K Urethane Filler Primer Gray

Application

Two-component urethane primer and filler that has rust cure properties on new and old metal surfaces. A universal primer providing an excellent base for Pro-Spray single stage or basecoat colour.

Color Gray
Pot Life 48 hours
Dry Time 12 hours
Contents 13.2 oz. / 373 g


Pro-Spray PSC-1000-12
2K Rapid Cut-in Spot Clear

Application

Two-component premium urethane clear coat for panel as well as spot repair refinishing. Ideal for door jambs, cut in of new parts and bumper repair. Offers outstanding gloss and durability. Excellent flow and leveling properties make this clear extremely easy to apply. If using a heat lamp, it can be sanded or buffed in 10 minutes.

Color Clear
Pot Life 24 hours
Dry Time 1.5 hours
IR 8-10 minutes
Contents 11.8 oz. / 337 g

How the 2K Aerosol Works

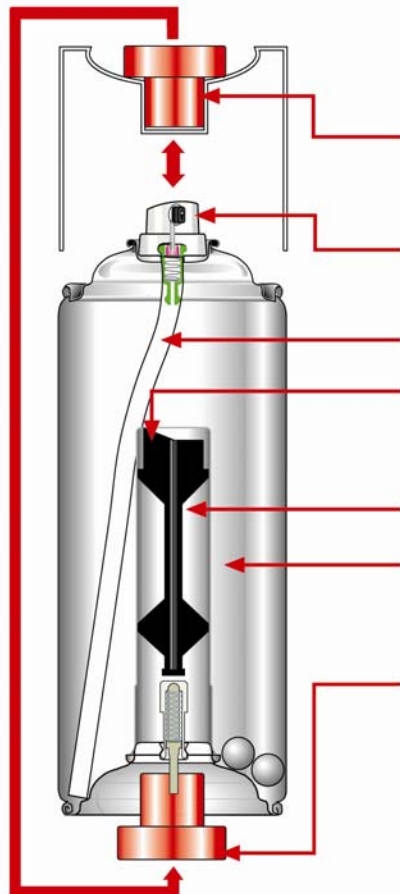

Red release nozzle in outer cap to be used on pin at the bottom of can to evacuate hardener into paint from cylinder.

SprayMax valve and nozzle in combination with new propellant technology.

Up take pipe and valve.

Perforated top of cylinder to release hardener into paint from cylinder.

Two part paint.

Separate hardener in cylinder (paint mix is 4:1 ratio).

When ready to activate take red cap from outer cap, insert into the pin on the bottom of the can using limited force, activating hardener into paint.